

116-2010-93

PCB Piezotronics Inc. claims proprietary rights in the information disclosed herein. Neither for nor any reproduction thereof will be disclosed to others without written consent of PCB Piezotronics Inc.

APPLICATION

NEXT ASS'Y	USED ON	VAR

REVISIONS


REV	DESCRIPTION	ECN	DATE	APP'D
D	ADD M116B03	16823	1/27/03	Qm

ELECTRICAL CONNECTOR
CO-AXIAL 10-32 UNF-2A

MODEL 060A14
CLAMP NUT
.55(14.0) HEX ³
ST STL (SUPPLIED)


M14 x 1.25-6g

MODEL 065A37
SEAL .025(0.64) THICK
BRASS (SUPPLIED)

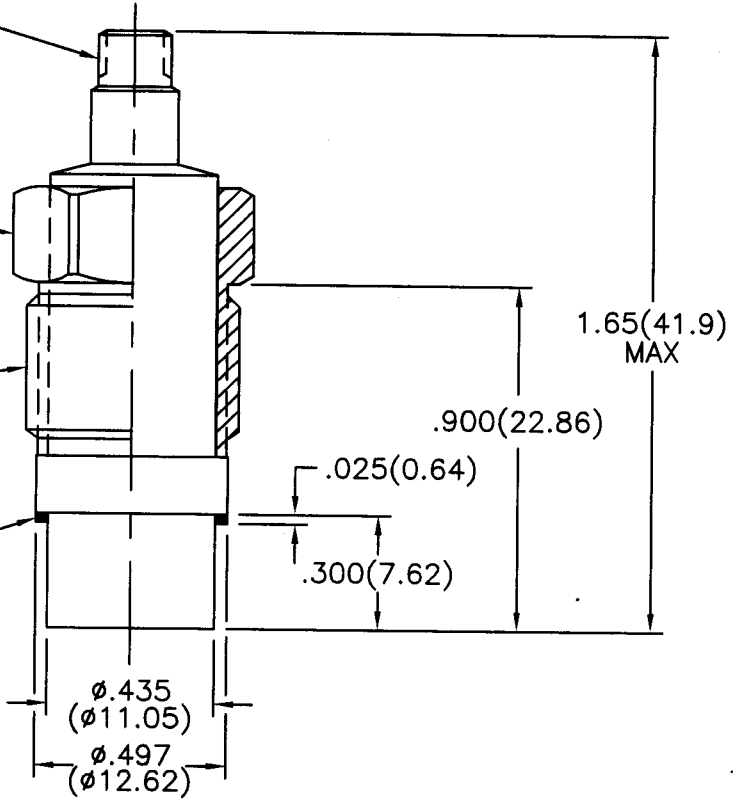

MOUNTING HOLE PREPARATION:

- ø.437(ø11.10) THRU
- └─┘ ø.500(ø12.70)
- X .600(15.24) ²
- TAP M14 X 1.25-6H
- X .450(11.43) ⁴

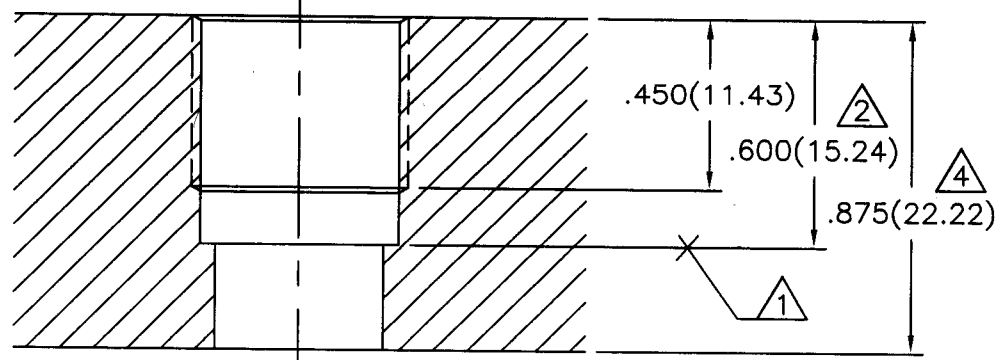

- ⁴ DIMENSIONS SHOWN ARE FOR .875(22.22) THICK WALL, └─┘ FOR THICKER WALLS.
- ³ RECOMMENDED MOUNTING TORQUE ON .55(14.0) HEX
5.0 - 6.0 FOOT POUNDS(7 - 8 NEWTON METERS).
- ² DRILL PERPENDICULAR TO MOUNTING SURFACE TO WITHIN ±1°
- ¹ SEAL SURFACE MUST BE FLAT AND FREE OF TOOL
MARKS WITH A MINIMUM FINISH OF 63√/(1.6√/).

UNLESS SPECIFIED TOLERANCES		DRAWN E2B 1/27/03 MFG Dec 1/29/03				 3425 WALDEN AVE. DEPEW, NY 14043 (716) 684-0001 EMAIL: SALES@PCB.COM	
DIMENSIONS IN INCHES	DIMENSIONS IN MILLIMETERS (IN PARENTHESIS)	CHK'D Qm 1/31/03	ENGR KLS 1/27/03	APP'D WJH 1/30/03 SALES Jmm 1/31/03			
DECIMALS XX ±.01 XXX ±.005	DECIMALS X ±0.3 XX ±0.13	TITLE INSTALLATION DRAWING MODEL M116B, M116B02, M116B03 PRESSURE SENSOR				CODE IDENT. NO. 52681	DWG. NO. 116-2010-93
ANGLES ±2 DEGREES	ANGLES ±2 DEGREES	DD011 REV. B 03/13/98				SCALE: 2X	SHEET 1 OF 1